

► Guide Post with Ballcage & Dowel Hole (DEMBB / DEMBA)



Material :-

- 1) FG 250
- 2) EN 353
- 3) Aluminium / Brass
- 4) FG 250
- 5) EN 353

Hardness :-

Pillar - 58 to 60 HRC
Bush - 58 to 60 HRC

Stopper Type :-


Movable Stopper (M)
Fixed Stopper (F)

Ballcage Type :-

DEMBB - With Alluminium Ballcage

DEMBA - With Brass Ballcage

Length of Ballcage = 1/3 of the Pillar length

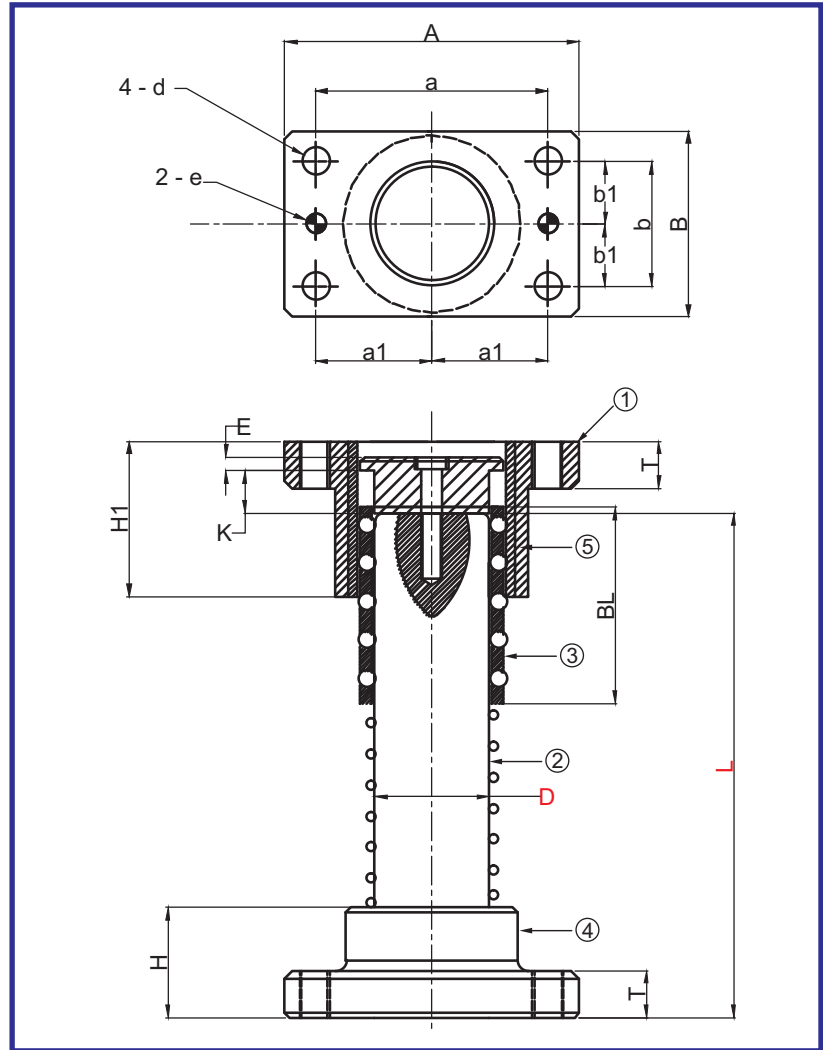

CODE	Dia D	A	B	a	a1	b	b1	H	H1	T	K	E	Ls	eh7	Dia d
Type		±1	±1	±0.015		±0.015		±0.5	±0.5	±0.2			±0.5	+0.015	
DEMB	20	74	44	56	28	30	15	30	40	15	20	5	40	6	6.6
DEMB	25	84	48	66	33	30	15	30	50	20	20	5	50	8	9
DEMB	30	100	58	76	38	36	18	40	60	20	25	5	60	8	11
DEMB	32	100	58	76	38	36	18	40	60	20	25	5	60	8	11
DEMB	36	130	75	100	50	44	22	50	70	25	30	10	70	10	11
DEMB	38	130	75	100	50	44	22	50	70	25	30	10	70	10	11
DEMB	40	130	75	100	50	44	22	50	70	25	30	10	70	10	11
DEMB	48	155	90	125	62.5	60	30	65	90	25	40	10	90	10	14
DEMB	50	155	90	125	62.5	60	30	65	90	25	40	10	90	10	14
DEMB	60	190	120	150	75	80	40	75	100	30	50	10	100	13	18

Order Type : Code - Stopper Type Dia (D) X Pillar Length

Example : DEMBB - F 25 X 200

Note : Kindly refer Page No.115 for Guide Post Length